


 **IE4/IP65 oil cooled**
permanet magnet motor.

 **Large size air end, low speed,**
sufficient air flow.

Single phase/3 phase
Both available

 **6PCS heavy-duty bearings, morse**
taper connection.

 **Easy to install and maintain.**

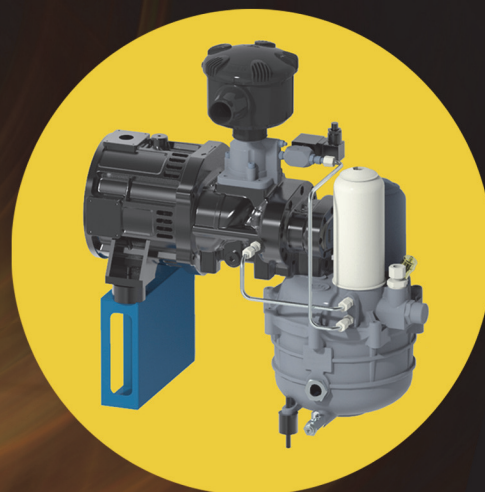

Model No.	Power (HP)	Discharge pressure (Bar)	Air delivery (L/min)	Tank (L)	Air dryer	Dimension L*W*H(mm)	Air outlet
TSC-4EV	4	8 10	420 360	x	x	800*525*755	1/2"
TSC-4EVT				90	x	1210*540*1040	
TSD-4EFT				160	Yes	1390*525*1040	
TSC-5EV	5	8 10	480 420	x	x	800*525*755	
TSC-5EVT				90	x	1210*540*1040	
TSD-5EFT				160	Yes	1390*525*1040	
TSC-7.5EV	7.5	8 10	756 660	x	x	800*525*755	
TSC-7.5EVT				90	x	1210*540*1040	
TSD-7.5EFT				160	Yes	1390*525*1040	
TSC-10EV	10	8 10	1180 1080	x	x	870*540*737	
TSC-10EVT				160	x	1390*540*1100	
TSD-10EFT				160	Yes	1390*540*1100	