


Environment-friendly

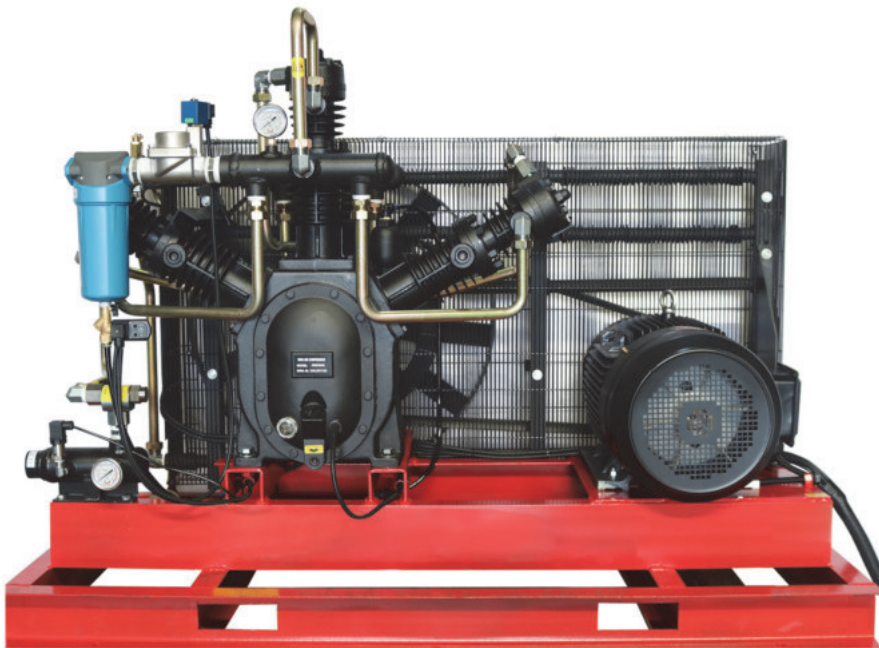

- With automatic start and stop, phase sequence protection, overload protection, overpressure protection, oil shortage protection, and automatic timing.
- With ATS air-water separator, with better water removal effect.
- The crankcase, cylinder, cylinder head and other components are all made of high-strength cast iron to ensure the service life of the booster.
- With Star delta soft start (Schneider contactor).

Specifications

Model No.	Intake pressure (Bar)	Exhaust pressure (Bar)	Low pressure intake capacity (L/Min)	High pressure Free Air delivery (L/Min)	Power (HP)	RPM	Weight (kg)	Dimension (mm)	Noise (dBA)
BC2040	10	40	>2000	2000	20	750	470	1400*810*1020	50
BC4040V	10	40	>4000	4000	25	750	680	1750*950*1250	50
BC4040	10	40	>4000	4000	25	870	680	1750*950*1250	55
BC6040	10	40	>6000	6000	30	870	710	1750*950*1250	55
BC8040	10	40	>8000	8000	40	870	830	1900*960*1270	55